

537,392

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



Rec'd PCT/PTO 02 JUN 2005
10/537392

(43) International Publication Date
17 June 2004 (17.06.2004)

PCT

(10) International Publication Number
WO 2004/051692 A2

(51) International Patent Classification⁷: H01J 23/00

(21) International Application Number:
PCT/GB2003/005199

(22) International Filing Date: 2 December 2003 (02.12.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0228011.3 2 December 2002 (02.12.2002) GB

(71) Applicant (for all designated States except US): E2V
TECHNOLOGIES LIMITED [GB/GB]; 106 Water-
house Lane, Chelmsford, Essex CM1 2QU (GB).

(72) Inventors; and

(75) Inventors/Applicants (for US only): BARDELL,
Stephen [GB/GB]; 3 Bishops Green, Barnston, Essex
CM6 1NF (GB). AITKEN, Steven [GB/GB]; 63 But-
terfield Road, Boreham, Chelmsford, Essex CM3 3BS

(GB). ANDREWS, Stuart, William [GB/GB]; 'Leander',
Wick Road, Langham, Colchester, Essex CO4 5PG (GB).
O'SULLIVAN, Neil [GB/GB]; 29 Petrel Way, Chelms-
ford, Essex CM2 8XH (GB). WHEELHOUSE, Alan,
Edward [GB/GB]; 9 Bradford Street, Bocking, Braintree,
Essex CM7 9AS (GB).


(74) Agent: LOVELESS, Ian, Mark; Reddie & Grose, 16
Theobalds Road, London WC1X 8PL (GB).

(81) Designated States (national): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC,
SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA,
UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (BW, GH,
GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE,

[Continued on next page]

(54) Title: ELECTRON BEAM TUBES

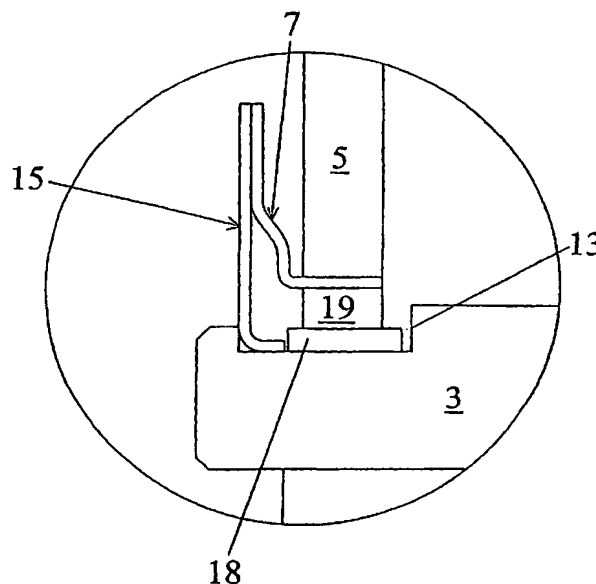

(57) Abstract: An electron beam tube (17) having a longitudinal axis comprises a first component, such as a ceramic wall (5) and a second component such as a drift tube assembly having a mounting plate (3). The tube further comprises means, such as member (18), arranged to allow relative sliding movement of the first component relative to the second component in a radial direction. The invention helps to alleviate mechanical stresses caused by differential thermal expansion of the components.

WO 2004/051692 A2



SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— without international search report and to be republished upon receipt of that report

ELECTRON BEAM TUBES

FIELD OF THE INVENTION

5

This invention relates to electron beam tubes, and particularly to linear beam devices.

BACKGROUND OF THE INVENTION

10

Linear beam devices are employed in order to amplify signals at high frequencies by modulating an electron beam.

15

Examples of such devices are klystrons and Inductive Output Tubes (IOTs). Such devices are typically employed as the final stage of amplification in television transmitters at frequencies within the UHF range (470 to 800 MHz). A typical linear beam device comprises an

20 electron gun for generating a beam of electrons, an RF interaction region, for example a series of drift tubes, where amplification of an RF signal takes place and a collector for dissipating the electron beam after it has left the RF interaction region. Amplification of the

25 signal takes place within a vacuum envelope.

Such devices may be of the so-called external cavity type, in which the vacuum envelope comprises a plurality of ceramic cylinders attached to metal structures, for

30 example mounting plates provided on drift tube assemblies.

A problem that may be encountered with such devices is that changes in temperature in the device can give rise to mechanical stress between components of the tube.

35

It has been proposed to alleviate such problems by the inclusion of so-called balance rings, usually of ceramic, which reduce such thermal stresses. However, it has been found that, in certain conditions, even with the inclusion
5 of balance rings, thermal stresses may be significant and may even cause damage to the ceramic walls defining the vacuum envelope.

SUMMARY OF THE INVENTION

10

The invention is defined in the claims to which reference is now directed.

15

The invention permits relative radial movement of components of the tube, in order to alleviate stress produced by differential thermal expansion between the components. The invention includes means arranged to produce relative sliding movement in the form of a member interposed between the components. This arrangement
20 maintains the integrity of the vacuum envelope.

The member may be annular, in order to correspond to the shape of the walls defining the vacuum envelope.

25

Preferably, the member includes material arranged to reduce friction between the components.

30

In an embodiment one of the components may include a portion of the ceramic wall forming part of the vacuum envelope. The other component may be part of a drift tube, such as the mounting plate.

BRIEF DESCRIPTION OF THE FIGURES

The invention will now be described, by way of example, with reference to the accompanying drawings, in which:

5

Figure 1: is a partly sectional schematic side view of a prior art electron beam tube;

Figure 1a: illustrates in more detail the portion of Figure 1 circled by a broken line;

10

Figure 2: is a partly sectional side view of an electron beam tube constructed according to the invention; and

Figure 2a: illustrates in more detail the portion of Figure 2 circled by a broken line.

15

DESCRIPTION OF A PREFERRED EMBODIMENT

Like reference numerals refer to like parts throughout the specification.

20

Figures 1 and 1a illustrate part of a conventional electron beam tube, indicated generally by the reference numeral 1, the tube having a longitudinal axis 2. The part illustrated in these Figures generally comprises the RF interaction region for the tube incorporating a drift tube assembly. Only one side of the tube is shown in detail in Figure 1a, the components illustrated being approximately symmetrical about the longitudinal axis.

25

30

A mounting plate 3 for the drift tube is shown in Figure 1a. The mounting plate is typically of copper, stainless steel or nickel. A vacuum envelope 4 for the tube is partially defined by a cylindrical wall of RF transparent material, such as alumina. The cylindrical wall 5 is substantially coaxial with the longitudinal axis 2. The

35

mounting plate 3 also forms part of the vacuum envelope 4. The cylindrical wall 5 is attached to the drift tube mounting plate 3 in the following manner.

5 An end surface 6 of the wall 5 is metallised and attached by brazing to a flare 7, which is of metallic material such as cupro-nickel. The flare 7 has a portion 8 that abuts the end face of the wall 5, and a transverse portion 9 that may be coaxial with the longitudinal axis 2 of the
10 tube.

The other side of the portion 8 of the flare 7 is attached to an end surface 10 of a ceramic balance ring 11 in a like fashion. The ceramic balance ring is coaxial with
15 the wall 5. The other end surface 12 of the balance ring 11 is located in a recess 13 in the mounting plate 3.

The recess 13 also includes an end portion 14 of a second flare 15, the other end portion 16 of which is welded to
20 the transverse portion 9 of the other flare 7.

The inclusion of the ceramic balance 11 ring helps to relieve thermal stresses in the assembly as the temperature of the tube 1 changes during operation.
25 However, it has been found that, in certain circumstances where the temperature difference experienced by the tube is greater than usual, thermally-induced mechanical stress can become unacceptably high.

30 A tube constructed in accordance with the invention is illustrated in Figures 2 and 2a, and is indicated generally by the reference numeral 17. This tube also comprises a cylindrical wall 5, attached to the mounting plate 3 of a drift tube assembly via the intermediary of a
35 balance ring and flares 7, 15.

However, in accordance with the invention, the tube 17 further comprises means, such as member 18, arranged to allow small radial movement of the balance ring with respect to the mounting plate, in order to alleviate thermal stresses on the tube.

In this arrangement, the member 18 is annular and is substantially coaxial with the cylindrical wall 5. The member is interposed between a balance ring 19 and the mounting plate 3. The member 18 is located in the recess 13 of the mounting plate and is held in location by atmospheric forces acting upon the tube when the interior has been evacuated to produce a vacuum.

The member 18 comprises material arranged to provide reduced friction between the balance ring 19 and the mounting plate 3. Preferably, the member has a lower coefficient of friction than both the balance ring and the mounting plate. Alternatively, a member coated with or loaded with friction-reducing material may be provided. As a further alternative, a layer of friction-reducing material may be substituted for the member 18. A plurality of friction-reducing members may be provided between the balance ring and the mounting plate.

This means arranged to allow radial movement of the balance ring with respect to the drift tube assembly may alternatively, or additionally, be interposed between other components of the tube, in order to further reduce stress experienced overall by the tube assembly. The invention has particular merits when the means is interposed between components having different coefficients of thermal expansion.

A tube assembly typically comprises a plurality of ceramic walls alternating with metallic structures, such as a plurality of drift tube assemblies. Therefore, a plurality of members 18, for example, may be located
5 between each ceramic and metallic component to provide relative radial movement of those components.

The invention permits the balance ring to move radially in order to alleviate the forces caused by differential
10 thermal expansion of components of the tube. The member moves in a sliding motion, thereby maintaining the integrity of the vacuum envelope. Thus, a tube constructed according to the invention can be operated
under substantially more onerous conditions than were
15 feasible hitherto.

The invention is particularly applicable to arrangements in which the balance ring is of ceramic and the mounting plate or electrode is a hard metal such as nickel. In
20 such circumstances, the ceramic balance ring can bind on the surface, which can cause stresses and cracking. The use of the member as described allowing the balance ring to slide overcomes this problem.

CLAIMS

1. An electron beam tube having a longitudinal axis and comprising a wall forming part of a vacuum envelope including a balance ring, a second component and means interposed between the wall including the balance ring and the second component arranged to allow relative sliding movement of the wall including the balance ring relative to the second component in a radial direction.
2. A tube as claimed in claim 1, in which the means comprises a member interposed between the first and second components.
3. A tube as claimed in claim 2, in which the member comprises an annulus.
4. A tube as claimed in claim 1, in which the means comprises a plurality of members interposed between the first and second components.
5. A tube as claimed in claim 4, in which each of the members comprises an annulus.
6. A tube as claimed in any preceding claim, in which the means includes material having a low coefficient of friction.
7. A tube as claimed in claim 1, in which the wall is of ceramic.
8. A tube as claimed in any preceding claim, in which the second component comprises part of a drift tube assembly.

9. A tube as claimed in claim 10, in which the part is a mounting plate for the drift tube.
- 5 10. An electron beam tube according to claim 1, wherein the balance ring is of ceramic.
- 10 11. An electron beam tube having a longitudinal axis and comprising a drift tube assembly, a wall forming part of a vacuum envelope including a balance ring and means interposed between the wall including the balance ring and the drift tube assembly arranged to allow relative sliding movement of the drift tube assembly relative to the wall including the balance ring in a radial direction.
- 15 12. An electron beam tube of the type having a longitudinal axis and a radial axis and comprising a wall, a balance ring and a mounting component, the wall forming part of a vacuum envelope and being coupled to the mounting component by the balance ring in the direction of the longitudinal axis, the electron beam tube further comprising a member interposed between the balance ring and the mounting component to allow relative sliding movement of the balance ring and the mounting component in a direction parallel to the radial axis.
- 20 25 13. An electron beam tube according to claim 12, wherein the balance ring is of ceramic.
- 30 14. An electron beam tube according to claim 12, wherein the mounting component is a mounting plate.

15. An electron beam tube according to claim 14, wherein the mounting plate is of copper, stainless steel or nickel.
- 5 16. An electron beam tube according to claim 12, wherein the member has a lower coefficient of friction than the balance ring and mounting component.
- 10 17. An electron beam tube according to claim 16, wherein the member is coated with friction-reducing material.
18. An electron beam tube according to claim 12, wherein the member comprises a layer of friction reducing material.

15

1/2

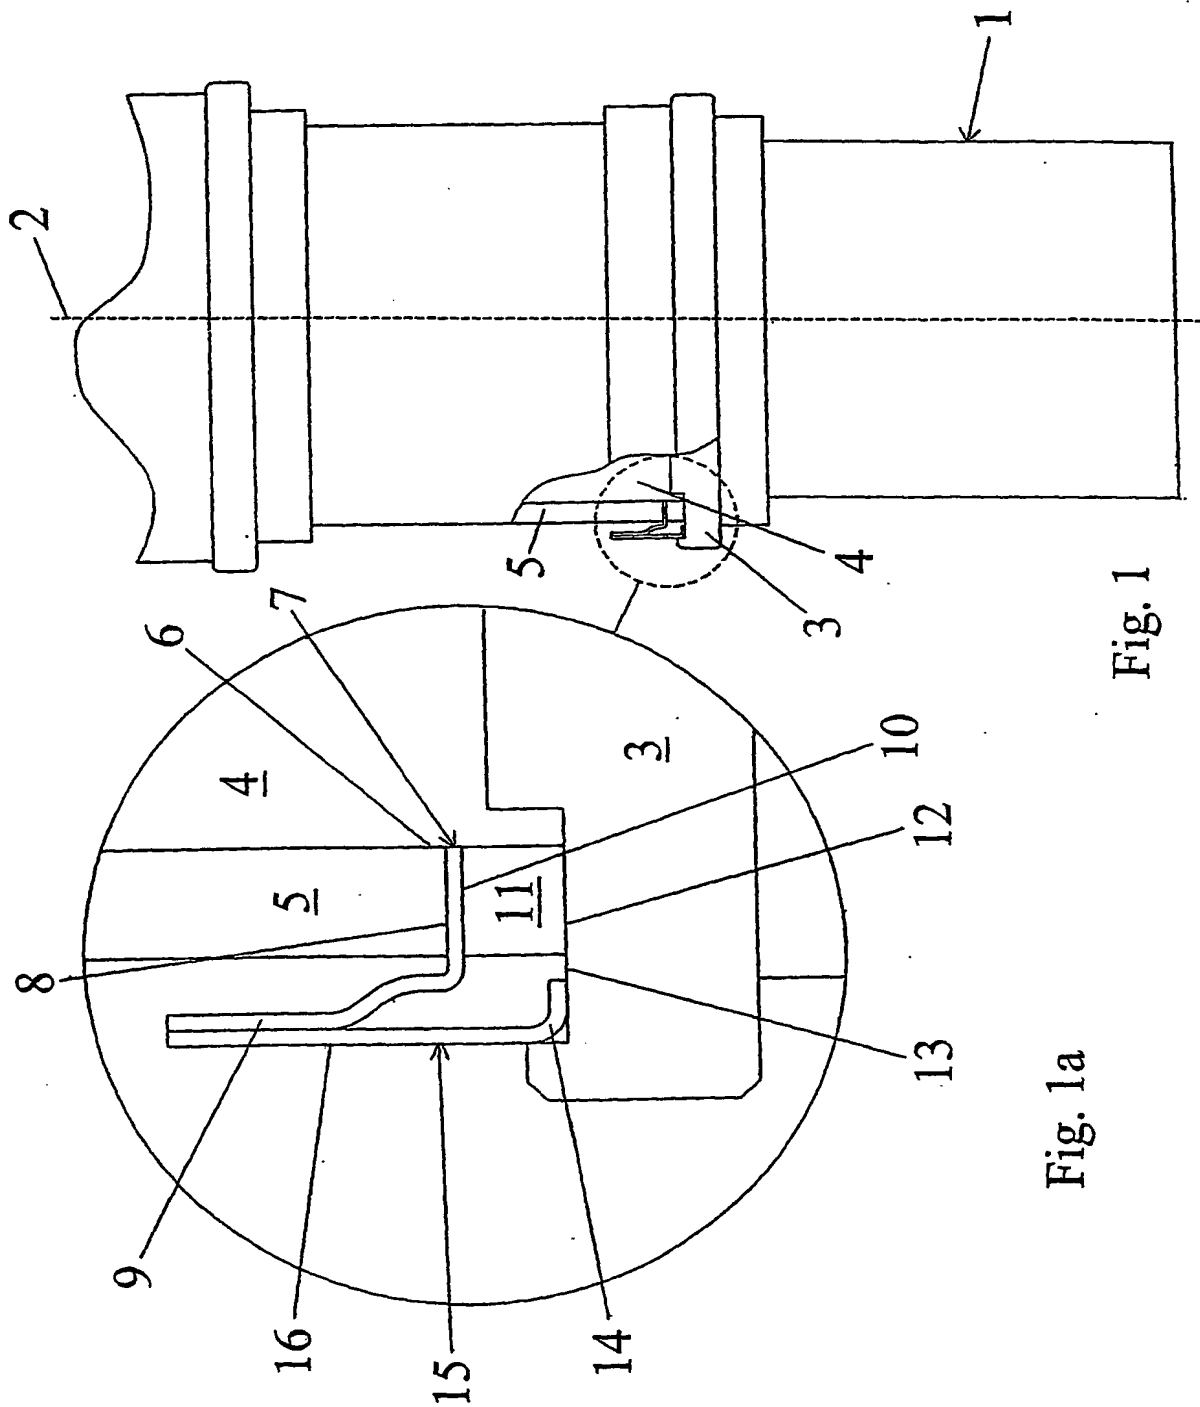


Fig. 1

Fig. 1a

2/2

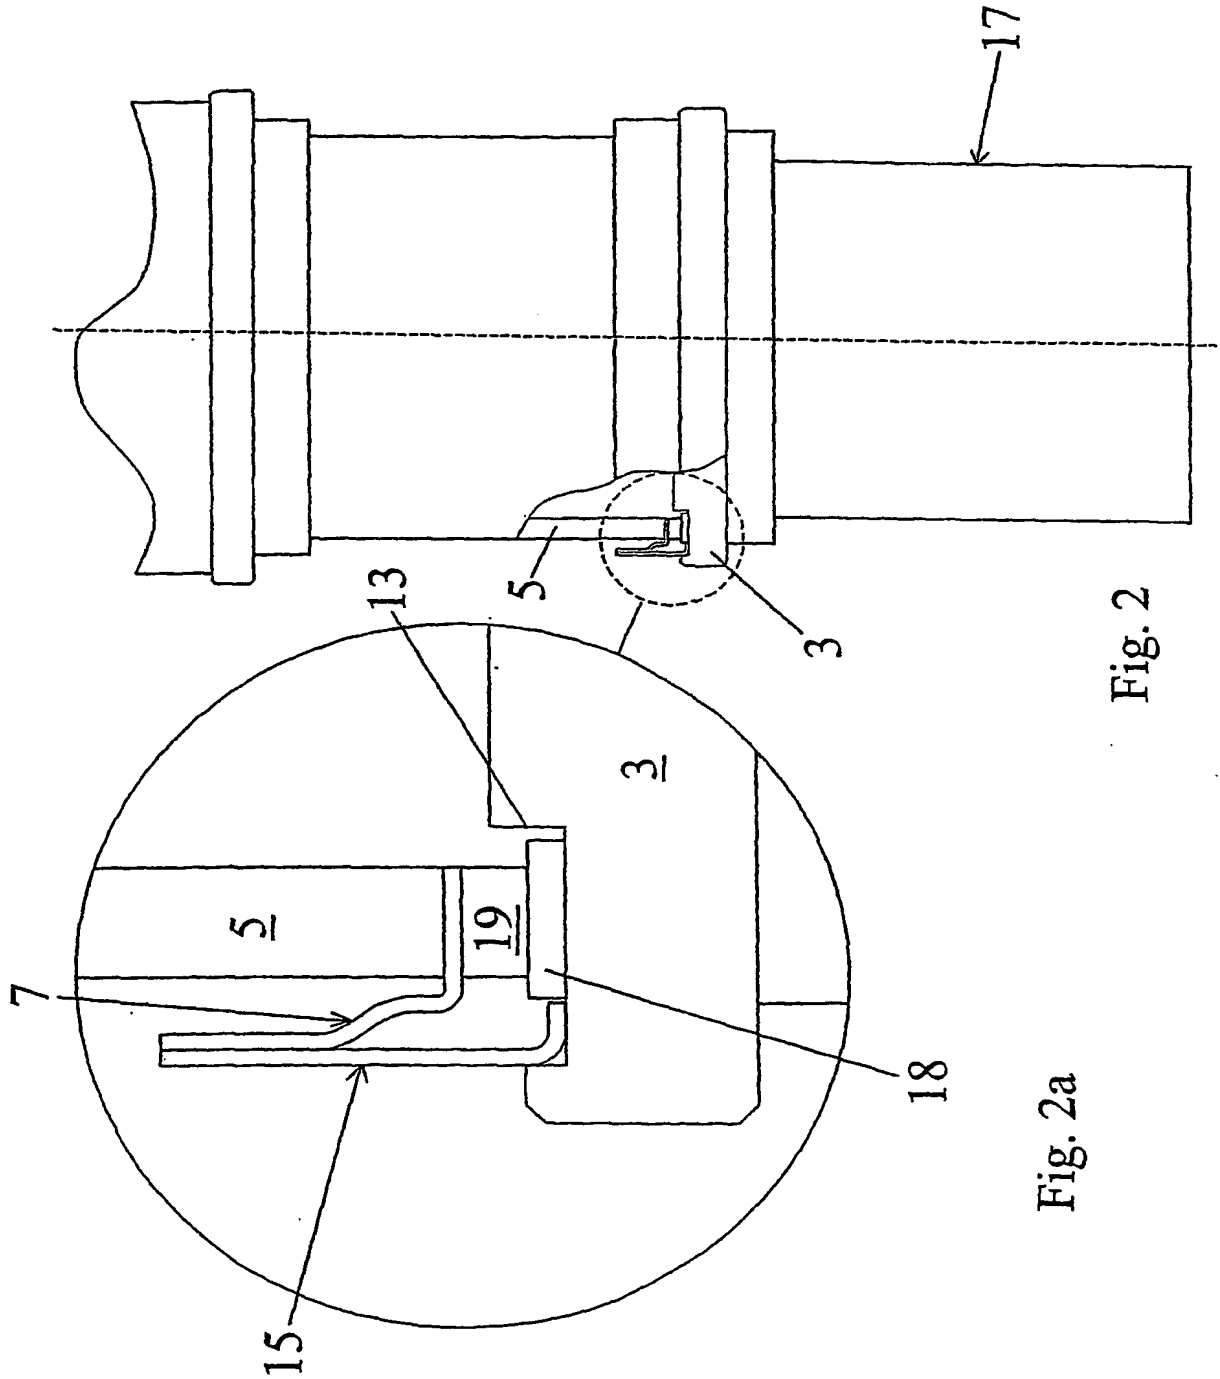


Fig. 2

Fig. 2a

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
17 June 2004 (17.06.2004)

PCT

Rec'd PCT/PTO 02 JUN 2005
10/537392
(10) International Publication Number
WO 2004/051692 A3

(51) International Patent Classification⁷: H01J 5/26, 23/12

(21) International Application Number:
PCT/GB2003/005199

(22) International Filing Date: 2 December 2003 (02.12.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0228011.3 2 December 2002 (02.12.2002) GB

(71) Applicant (for all designated States except US): E2V
TECHNOLOGIES LIMITED [GB/GB]; 106 Water-
house Lane, Chelmsford, Essex CM1 2QU (GB).

(72) Inventors; and

(75) Inventors/Applicants (for US only): BARDELL,
Stephen [GB/GB]; 3 Bishops Green, Barnston, Essex


CM6 1NF (GB). AITKEN, Steven [GB/GB]; 63 But-
terfield Road, Boreham, Chelmsford, Essex CM3 3BS
(GB). ANDREWS, Stuart, William [GB/GB]; 'Leander',
Wick Road, Langham, Colchester, Essex CO4 5PG (GB).
O'SULLIVAN, Neil [GB/GB]; 29 Petrel Way, Chelms-
ford, Essex CM2 8XH (GB). WHEELHOUSE, Alan,
Edward [GB/GB]; 9 Bradford Street, Bocking, Braintree,
Essex CM7 9AS (GB).

(74) Agent: LOVELESS, Ian, Mark; Reddie & Grose, 16
Theobalds Road, London WC1X 8PL (GB).

(81) Designated States (national): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC,
SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA,
UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

[Continued on next page]

(54) Title: ELECTRON BEAN TUBES

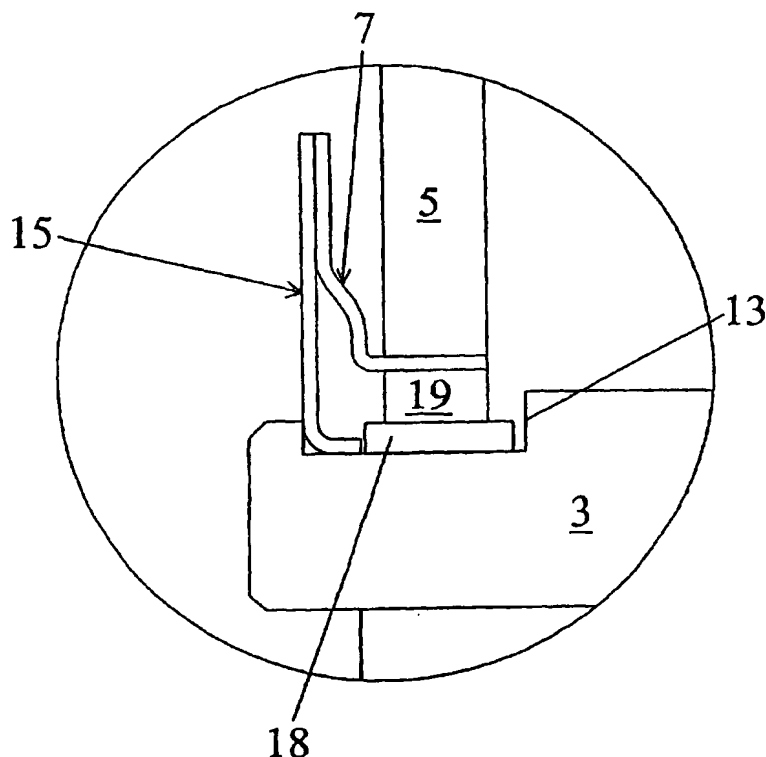

(57) Abstract: An electron beam tube (17) having a longitudinal axis comprises a first component, such as a ceramic wall (5) and a second component such as a drift tube assembly having a mounting plate (3). The tube further comprises means, such as member (18), arranged to allow relative sliding movement of the first component relative to the second component in a radial direction. The invention helps to alleviate mechanical stresses caused by differential thermal expansion of the components.



(84) **Designated States (regional):** ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

(88) **Date of publication of the international search report:**
12 August 2004

Published:

— *with international search report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

INTERNATIONAL SEARCH REPORT

International Application No.
/GB 03/05199

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 H01J5/26 H01J23/12

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H01J

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with Indication, where appropriate, of the relevant passages	Relevant to claim No.
X	GB 2 172 425 A (ENGLISH ELECTRIC VALVE CO LTD) 17 September 1986 (1986-09-17) abstract page 2, line 11 - line 34; figure 3	1-16, 18
X	US 3 111 600 A (LEVIN MARTIN E) 19 November 1963 (1963-11-19) column 2, line 6 - column 3, line 47; figure	1-14, 16, 18
X	US 5 684 364 A (HEPPINSTALL ROY ET AL) 4 November 1997 (1997-11-04) column 1, line 28 - line 58; figure 1 column 3, line 14 - line 59; figures 2-4 ----- -/--	1-6, 8-14, 16, 18

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *Z* document member of the same patent family

Date of the actual completion of the international search

24 June 2004

Date of mailing of the international search report

01/07/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax (+31-70) 340-3016

Authorized officer

Lang, T

INTERNATIONAL SEARCH REPORT

ational A on No

/GB 03/05199

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	<p>US 2 903 614 A (HALL JAMES L ET AL) 8 September 1959 (1959-09-08)</p> <p>column 3, line 3 - line 57; figure 2 column 5, line 1 - line 57; figure 3</p> <p>-----</p>	<p>1-9, 11, 12, 14, 15, 18</p>

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

/GB 03/05199

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
GB 2172425	A	17-09-1986	GB 2172424 A	17-09-1986
			DE 3608268 A1	18-09-1986
			SE 8601157 A	15-09-1986
			US 4728860 A	01-03-1988
<hr/>				
US 3111600	A	19-11-1963	NONE	
<hr/>				
US 5684364	A	04-11-1997	CN 1100234 A ,B	15-03-1995
			DE 4418649 A1	08-12-1994
			FR 2706078 A1	09-12-1994
			GB 2278720 A ,B	07-12-1994
			IT T0940456 A1	05-12-1994
			JP 7073812 A	17-03-1995
<hr/>				
US 2903614	A	08-09-1959	NONE	
<hr/>				